




- PA2 type cable glands for use with all un-armoured cables.
- Suitable for most climatic conditions, weatherproof and waterproof.
- Environmental seal for outer sheath of the cable to IP 66.
- Cable gland kit consists:
 - PVC - Brass Gland, Steel Locknut & PVC Shroud.
 - LSZH - Brass Gland, Steel Locknut & LSZH Shroud

Technical Specification:

Threading:	Metric	Material Grade:	Brass CuZn39Pb3 (CW614N)
Standard:	IEC 62444:2013 – Under Certification	Cable Type:	All Types of Un-Armoured.
IP Rating:	IP 66	Continuous Operating Temperature:	PVC: -20°C to +90°C LSZH: -20°C to +130°C

Cable Gland Selection Table:									
Cable Gland Size	Entry Thread 'C'	Minimum Thread Length 'G'	Overall Cable Diameter 'A'		Across Flat 'E'	Across Corners 'D'	Nominal Protrusion Length 'F'	Ordering Reference PVC	Ordering Reference LSZH
			Min	Max	Max	Max			
2016	M20	12	3.5	9.0	18.0	20.0	17.0	PA22016 PACK	PA22016LSZH PACK
20S	M20	12	8.0	11.8	20.0	22.0	18.0	PA220S PACK	PA220SLSZH PACK
20	M20	12	11.0	13.8	22.0	24.5	18.0	PA220 PACK	PA220LSZH PACK
25	M25	12	13.0	19.8	30.0	33.0	20.0	PA225 PACK	PA225LSZH PACK
32	M32	12	19.0	26.4	38.0	42.5	24.0	PA232 PACK	PA232LSZH PACK
40	M40	15	25.0	32.4	43.5	48.0	27.0	PA240 PACK	PA240LSZH PACK
50S	M50	15	31.5	38.0	50.2	54.5	28.0	PA250S PACK	PA250SLSZH PACK
50	M50	15	37.0	43.5	55.0	60.8	28.0	PA250 PACK	PA250LSZH PACK
63S	M63	15	42.5	49.0	65.0	70.0	30.0	PA263S PACK	PA263SLSZH PACK
63	M63	15	48.5	55.5	70.0	76.0	30.0	PA263 PACK	PA263LSZH PACK
75S	M75	15	54.5	62.0	75.0	84.0	32.0	PA275S PACK	PA275SLSZH PACK
75	M75	15	60.5	67.0	80.0	88.0	32.0	PA275 PACK	PA275LSZH PACK
90	M90	15	70.0	79.0	100.0	109.0	34.0	PA290 PACK	PA290LSZH PACK

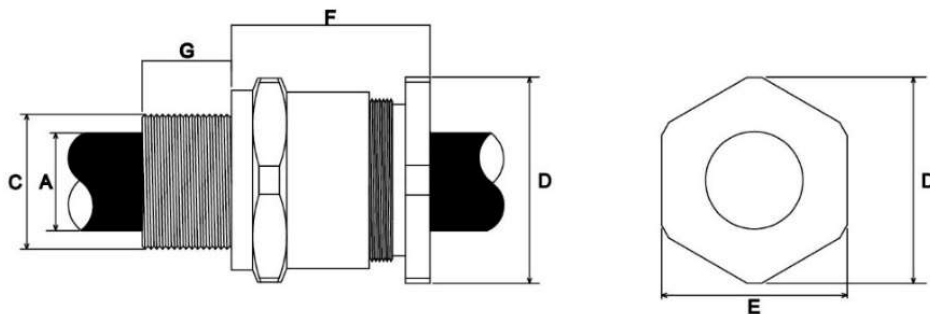

PA2.V03.22